

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 25/50, BP 25/50 D



Maximum reliability

Engine and V-belts protected against damage



Powerful vibration

Plastic mat for paving work (optional)



Safe transport

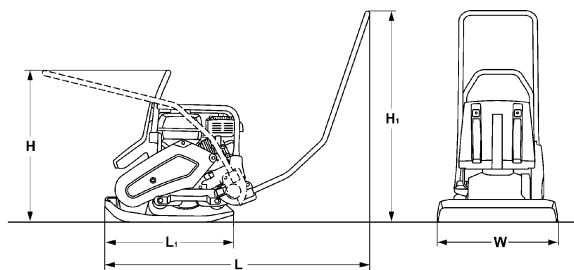
Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3**BP 25/50** 0,236**BP 25/50 D** 0,245**Standard Equipment**

- ☒ Vibration insulated steering bow, foldable
- ☒ Detachable steering handle
- ☒ Highly wear resistant base plate
- ☒ Fully automatic decompression (BP25/50D)
- ☒ Recoil starter
- ☒ Engine protection frame
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Protective covering
- ☒ 3-2-1 Warranty
- ☒ Automatic shutdown at low oil level (BP25/50)

Optional Equipment

- ☐ Sprinkler system (+10kg)
- ☐ Transport wheels (+4kg)
- ☐ Plastic mat
- ☐ Special painting
- ☐ Service Kit (BP25/50)
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle
- ☐ Central comfort guide handle (BP25/50)

**Dimensions in mm**

	H	H1	H2	L	L1	W
BP 25/50	658	962	700	1084	542	500
BP 25/50 D	708	962	700	1084	542	500

Technical Data**Weights**

Operating weight CECE	kg	108
Basic weight	kg	107

Dimensions

Working width	mm	500	500
---------------------	----	-----	-----

Driving Characteristics

Working speed, max.	m/min	30	30
Max. gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer	Honda	Hatz
Type	GX 160	1B20
Emission stage	StageV/CARB P.3	Stage V
Cooling	air	air
Number of cylinders	1	1
Performance ISO 3046	kW	3,1
Speed	min-1	3.600
Drive system	mech.	mech.
Fuel	Gasoline	Diesel
Fuel comsump. aver. during operation	l/h	1,1

Exciter system

Frequency	Hz	92	92
Centrifugal force	kN	25	25
Amplitude	mm	1,75	1,75

Capacities

Fuel	l	3,1	3,0
Water	l	13,5	13,5

Technical modifications reserved. Machines may be shown with options.



PRE 230 17 010

040219 Sa03

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

